


REVISIONS			
REV	DESCRIPTION	DATE	BY

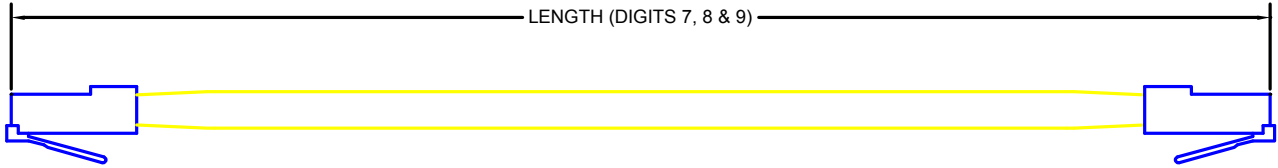

ASSEMBLY SPECIFICATIONS:

CATEGORY 5E (PATCHCORD)
CONNECTORS RJ-45
SHIELDED
CABLE DIAMETER <0.22"
MIN BEND RADIUS 0.8"
PIN-OUT CONFIGURATION 568A, 568B OR CROSSOVER
(AS SPECIFIED)
OPERATING TEMP RANGE -20°C TO +60°C

CABLE SPECIFICATIONS:

WIRE TYPE STRANDED
WIRE GAUGE 26 AWG
WIRE CONFIGURATION 4 TWISTED PAIRS
PAIR 1 BLUE / BLUE-WHITE
PAIR 2 ORANGE / ORANGE-WHITE
PAIR 3 GREEN / GREEN-WHITE
PAIR 4 BROWN / BROWN-WHITE
JACKET MATERIAL PVC
SHIELDED
STANDARD COMPLIANCE ANSI/TIA/EIA-568-B.2-1

△ PART NUMBER INFORMATION: F 1 2 3 4 5 6 7 8 9 10 11

NOTES:

△ REFERENCE FIBERDYNE LABS QA132 FOR PART NUMBER BUILD MATRIX.

△ EXAMPLE PART NUMBER IS ILLUSTRATIVE ONLY. REFERENCES MAY CHANGE WITHOUT NOTICE. FOR ACTUAL BUILD NUMBER DATA, REFERENCE THE CURRENT PART NUMBER BUILD MATRIX.

EXAMPLE: **△**

PART NUMBER: FBHS0Z1001MA

- FIBERDYNE LABS ETHERNET CABLE USING 568B WIRING PATTERN
- SHIELDED, NON-PLENUM, STRANDED
- SNAGLESS BOOTS (SAME COLOR AS CABLE)
- CAT 5E COMPLIANCE
- 1 METER IN LENGTH
- GRAY JACKET (AND BOOT) COLOR

FIBERDYNE CONFIDENTIAL UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS IN INCHES TOLERANCES: 0.X = ±0.05 0.0X = ±0.015 0.XXX = ±0.005 ANG. = ±0.5° REMOVE ALL BURRS AND SHARP CORNERS 0.01R			FRANKFORT, NY 13340 800-894-9694
	NAME CABLE ASSY - MODULAR - 4 PAIR SHIELDED		
	DWG BY M. STREETER	DWG # 075-10651-001	
	DATE 02-21-04	SCALE NONE	SHEET 01 OF 01