


Fiberdyne Configuration 42

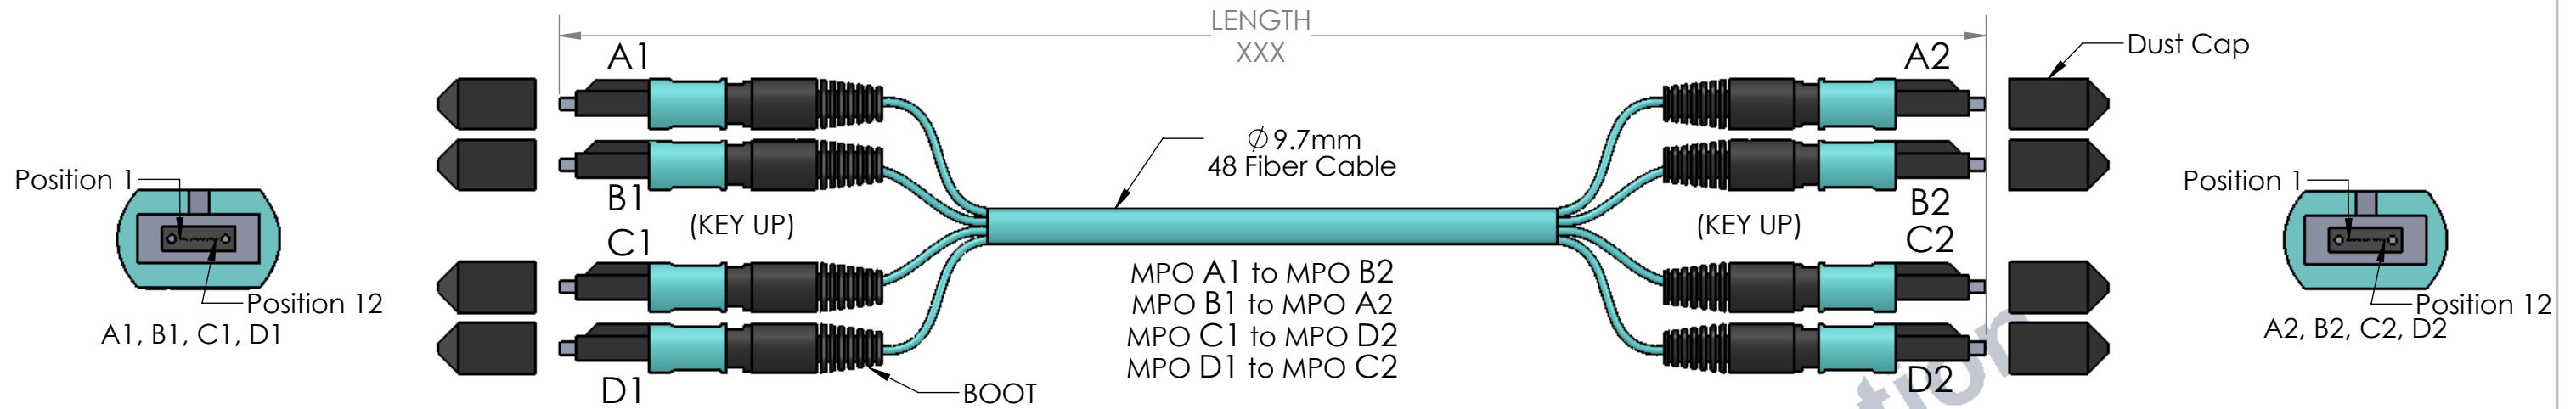

100Gb MPO Assemblies

Fiberdyne Part Number	Fiberdyne Configuration 42	Cable Type 50/125 OM3 (Max 100m)	Fiber Count	End A,B,C & D Connectors	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-042010-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	NP-NP	<.75
FMT-042020-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	NP-P	<.75
FMT-042030-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	P-NP	<.75
FMT-042040-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	P-P	<.75
FMT-042050-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	NP-NP	<.35
FMT-042060-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	NP-P	<.35
FMT-042070-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	P-NP	<.35
FMT-042080-XXXM	100GBASE-SR10	3mm Round Plenum OM3	48	MPO 1x12	P-P	<.35
Fiberdyne Part Number	Fiberdyne Configuration 42	Cable Type 50/125 OM4 (Max 150m)	Fiber Count	End A,B,C & D Connectors	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-042110-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	NP-NP	<.75
FMT-042120-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	NP-P	<.75
FMT-042130-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	P-NP	<.75
FMT-042140-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	P-P	<.75
FMT-042150-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	NP-NP	<.35
FMT-042160-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	NP-P	<.35
FMT-042170-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	P-NP	<.35
FMT-042180-XXXM	100GBASE-SR10	3mm Round Plenum OM4	48	MPO 1x12	P-P	<.35

*Insertion Loss for Connector Only

Fiberdyne Configuration 42

MPO-MPO, 100G,Trunk, Four 12 Pin 10 Fiber MPO to Four 12 Pin 10 Fiber MPO, Option B

Fiber Color	Lane Assignment Connector A1	Position # Connector A1 Left Side	Position # Connector B2 Right Side	Lane Assignment Connector B2	Fiber Color
Blue	Unused	1	12	Unused	Blue
Orange	TX0	2	11	RX0	Orange
Green	TX1	3	10	RX1	Green
Brown	TX2	4	9	RX2	Brown
Grey	TX3	5	8	RX3	Grey
White	TX4	6	7	RX4	White
Red	TX5	7	6	RX5	Red
Black	TX6	8	5	RX6	Black
Yellow	TX7	9	4	RX7	Yellow
Purple	TX8	10	3	RX8	Purple
Pink	TX9	11	2	RX9	Pink
Aqua	Unused	12	1	Unused	Aqua
Fiber Color	Lane Assignment Connector B1	Position # Connector B1 Left Side	Position # Connector A2 Right Side	Lane Assignment Connector A2	Fiber Color
Blue	Unused	1	12	Unused	Blue
Orange	RX0	2	11	TX0	Orange
Green	RX1	3	10	TX1	Green
Brown	RX2	4	9	TX2	Brown
Grey	RX3	5	8	TX3	Grey
White	RX4	6	7	TX4	White
Red	RX5	7	6	TX5	Red
Black	RX6	8	5	TX6	Black
Yellow	RX7	9	4	TX7	Yellow
Purple	RX8	10	3	TX8	Purple
Pink	RX9	11	2	TX9	Pink
Aqua	Unused	12	1	Unused	Aqua

*Pin configuration show also applies for MPO C1 to MPO D2 & MPO D1 to MPO C2

RoHS

Fiberdyne Labs Inc. Frankfort, NY
www.fiberdyne.com

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.

FIBERDYNE LABS INC.

TITLE: Fiberdyne Configuration 42

MPO-MPO, Four 12 Pin 10 Fiber to Four 12 Pin 10 Fiber,100G

Option B

SIZE B	DWG. NO. 075-11767-001	REV A
------------------	---------------------------	----------

SCALE: 1:1 ECR: 14006-001 SHEET 1 OF 1