


12 Pack Singlemode Simplex OS2 900µm Pigtail Assemblies



Other Connectors Available

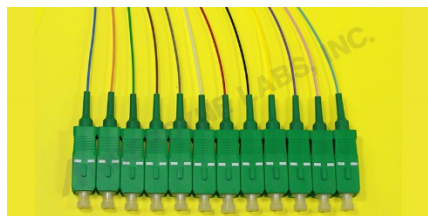

LC/UPC



LC/APC



SC/UPC



SC/APC



FC/UPC



FC/APC



ST/UPC

[2 & 3mm cables available](#)

[Fiber Optic Pigtails](#)

[6 Pack Singlemode Simplex OS2 900µm Pigtails](#)

Cable & Connector Specifications:	
Fiber Type	Singlemode OS2 (SMF-28)
Insertion Loss Per Connector	< 0.3dB, Typical 0.25dB
Return Loss VS. Polish Type	UPC: > 50dB, Typical 55dB
Apex Offset	< 50µm
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	2.2cm to 3.5cm Available

LC/UPC-Pigtail 12 Pack	F9G1BA4GCL0XXM-12P	Specify Length When Ordering
LC/APC-Pigtail 12 Pack	F9G1BA4GCN0XXM-12P	Specify Length When Ordering
SC/UPC-Pigtail 12 Pack	F9G1BA4GC60XXM-12P	Specify Length When Ordering
SC/APC-Pigtail 12 Pack	F9G1BA4GCB0XXM-12P	Specify Length When Ordering
FC/UPC-Pigtail 12 Pack	F9G1BA4GC70XXM-12P	Specify Length When Ordering
FC/APC-Pigtail 12 Pack	F9G1BA4GCA0XXM-12P	Specify Length When Ordering
ST/UPC-Pigtail 12 Pack	F9G1BA4GC10XXM-12P	Specify Length When Ordering

Other Connector Combinations available.