


50/125 OM2 6 Pack Color Coded 900µm Pigtail Assemblies

2 & 3mm cables available

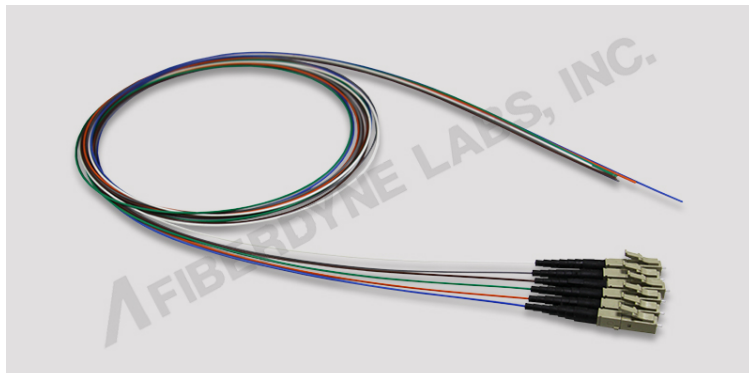

Cable & Connector Specifications:	
Fiber Type	50/125 OM2 Multimode
Insertion Loss Per Connector	< 0.3dB, Typical 0.25dB
Return Loss VS. Polish Type	UPC: > 50dB, Typical 55dB APC: > 60dB, Typical 65dB
Apex Offset	< 50µm
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	2.2cm to 3.5cm Available

50/125 OM2 6 Pack Color Coded 900µm Pigtail Assemblies		
LC-Pigtail 6 Pack	F9G1BC4GCL0XXXM6P	Specify Length When Ordering
SC-Pigtail 6 Pack	F9G1BC4GC60XXXM6P	Specify Length When Ordering
ST-Pigtail 6 Pack	F9G1BC4GC10XXXM6P	Specify Length When Ordering
FC-Pigtail 6 Pack	F9G1BC4GC70XXXM6P	Specify Length When Ordering

Other Connector Combinations available.