


6 Pack Singlemode Simplex OS2 900µm Pigtail Assemblies

Other Connectors Available

[2 & 3mm cables available](#)

[Fiber Optic Pigtails](#)

[12 Pack Singlemode Simplex OS2 900µm Pigtails](#)

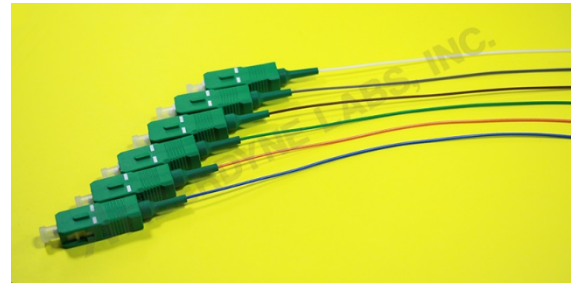

SC/APC-Connector

Cable & Connector Specifications:	
Fiber Type	Singlemode OS2 (SMF-28)
Insertion Loss Per Connector	< 0.3dB, Typical 0.25dB
Return Loss VS. Polish Type	UPC: > 50dB, Typical 55dB APC: > 60dB, Typical 65dB
Apex Offset	< 50µm
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	2.2cm to 3.5cm Available

6 Pack Singlemode Simplex OS2 900um Pigtail Assemblies		
LC/UPC-Pigtail Simplex	F9G1BA4GCL0XXM-6P	Specify Length When Ordering
LC/APC-Pigtail Simplex	F9G1BA4GCN0XXM-6P	Specify Length When Ordering
SC/UPC-Pigtail Simplex	F9G1BA4GC60XXM-6P	Specify Length When Ordering
SC/APC-Pigtail Simplex	F9G1BA4GCB0XXM-6P	Specify Length When Ordering
FC/UPC-Pigtail Simplex	F9G1BA4GC70XXM-6P	Specify Length When Ordering
FC/APC-Pigtail Simplex	F9G1BA4GCA0XXM-6P	Specify Length When Ordering
ST/UPC-Pigtail Simplex	F9G1BA4GC10XXM-6P	Specify Length When Ordering

Other Connector Combinations available.