


# Fiberdyne Configuration 555

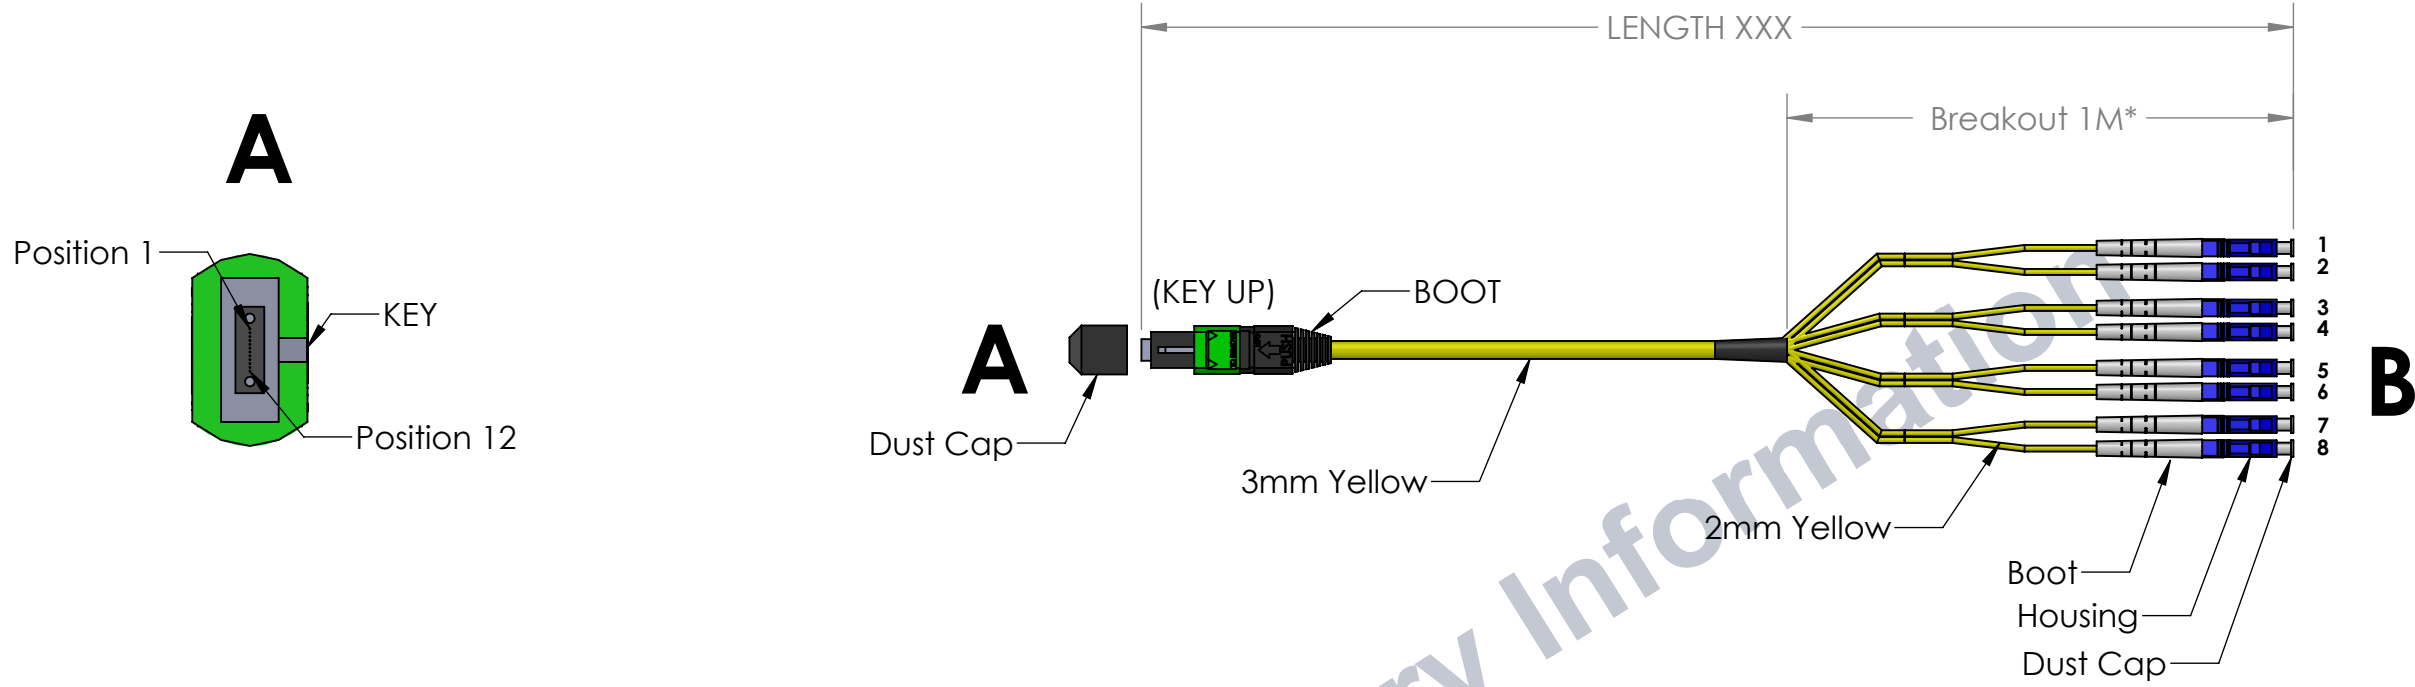

MPO 12 Pin to LC 8 Fiber, SM, 2mm Breakout, No Clips						
Fiberdyne Part Number	Cable Type OS2	Fiber Count	End A Connector	End B Connector	Guide Pin P=Pinned(Male) NP=Non-Pinned(Female)	Insertion Loss (IL) Standard / Low Loss*
FMT-555010-XXXM	OS2 Round	12	MPO 1x12	LC	NP-NP	<.75
FMT-555030-XXXM	OS2 Round	12	MPO 1x12	LC	P-NP	<.75
FMT-555050-XXXM	OS2 Round	12	MPO 1x12	LC	NP-NP	<.35
FMT-555070-XXXM	OS2 Round	12	MPO 1x12	LC	P-NP	<.35

\*Insertion Loss for Connector Only

Fiberdyne Configuration 555			
MPO 12 Pin to LC 8 Fiber, SM, 2mm Breakout, No Clips			
Fiber Color	Pin # Connector A	Breakout B, LC	Fiber Color
Blue	1	Not Used	Blue
Orange	2	Not Used	Orange
Green	3	1	Green
Brown	4	2	Brown
Grey	5	3	Grey
White	6	4	White
Red	7	5	Red
Black	8	6	Black
Yellow	9	7	Yellow
Purple	10	8	Purple
Pink	11	Not Used	Pink
Aqua	12	Not Used	Aqua

\* 1M standard breakout length, custom lengths available  
Custom Connectors also available

## RoHS

ZONE	-1	Original Publication	12/21/15	fmo
REV.		DESCRIPTION	DATE	APPROVED
REVISIONS				

**Fiberdyne Labs Inc. Frankfort, NY**  
[www.fiberdyne.com](http://www.fiberdyne.com)

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Fiberdyne Labs Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Fiberdyne Labs Inc IS PROHIBITED.

FIBERDYNE LABS INC.		
TITLE: Fiberdyne Configuration 555		
MPO 12 Pin to LC 8 Fiber, SM, 2mm Breakout, No Clips		
SIZE <b>B</b>	DWG. NO. 900_12455_001	REV -1
SCALE: 1:1		SHEET 1 OF 1