



## Bare Ribbon Fiber Fanout Assemblies

Fiberdyne Labs is proud to offer 12 Fiber Bare Ribbon Fiber Fanout Assemblies as a low-cost option for terminating ribbon fiber trunk cables. The bare ribbon end allows for mass fusion splicing while the 900um buffered fanouts with factory terminated connectors provides efficient connections to termination hardware without the time and expense of installing fanout kits and field installable connectors. Fiberdyne Labs offers ribbon fanout assemblies in multimode OM1, OM3, OM4 and in single mode OS2 rated fiber.

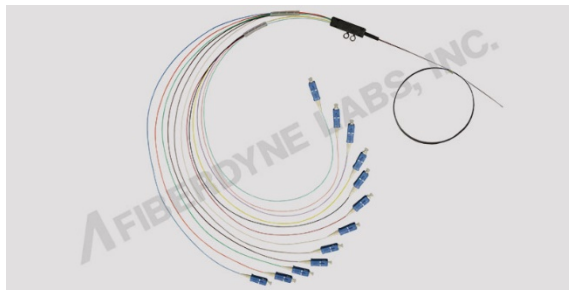

SC Ribbon Fanout

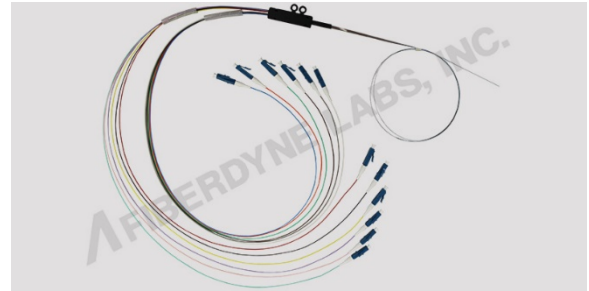

LC Ribbon Fanout

FRF	-	XXX	-	XX	XX	-	0	X
		Fiber Type		Ribbon Fiber Length	Fanout Fiber Length		Ribbon Connector	Fanout Connector
<b>F=Fiberdyne</b>		OM1=62.5/125		72=72 Inches	24=24 Inches		0=None	0=None
<b>R=Ribbon</b>		OM3=50/125 (300m)		XX=Custom (Specify)	47=47 Inches			1=FC/UPC
<b>F=Fanout</b>		OM4=50/125 (500m)			XX=Custom (Specify)			2=FC/APC
		OS2=Single Mode						3=SC/UPC
								4=SC/APC
								7=Custom (Specify)
								L=LC/UPC
								N=LC/APC