

Corning Singlemode Duplex OS2 2.0mm Riser Cables

Custom Labeling Available

Other Connector Combinations Available


Boot Options:

- - Short boots
- - Bendable Boots
- - *45° Boots
- - *90° Boots

Plenum cable available upon request

3mm cables available

***Not available on all boots**

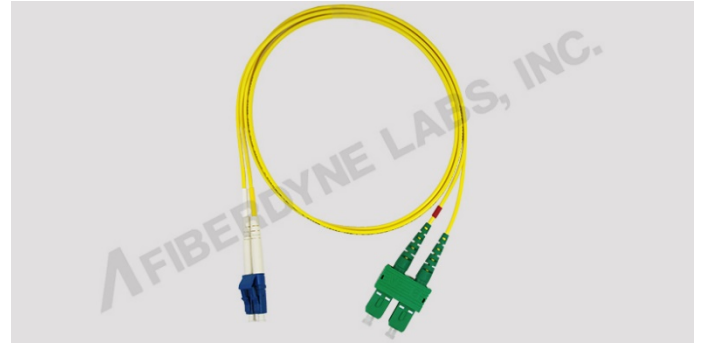

LC Clipped

SC Yoked

Cable & Connector Specifications:	
Fiber Type	Singlemode OS2 (SMF-28)
Insertion Loss Per Connector	< 0.3dB, Typical 0.25dB
Return Loss VS. Polish Type	UPC: > 50dB, Typical 55dB
Apex Offset	< 50µm
Fiber Height	< 100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Strain Relief Boot Lengths	3cm to 3.5cm Available

Corning Singlemode Duplex OS2 2.0mm Riser Cables		
LC/UPC-LC/UPC	F1C21A2SCCCXXXM	Specify Length When Ordering
LC/UPC-SC/UPC	F1C21A2SCLYXXXM	Specify Length When Ordering
SC/UPC-SC/UPC	F1C21A2SCYXXXM	Specify Length When Ordering
SC/UPC-ST/UPC	F1C21A2SCY1XXXM	Specify Length When Ordering
ST/UPC-ST/UPC	F1C21A2SC11XXXM	Specify Length When Ordering