

Custom Labeling Available
 Other Connector Combinations Available
 Boot Options:


- Short Boots
- Bendable Boots
- *45° Boots
- *90° Boots
- Uni-Boots available for LCs

LC & SC connectors available with or without duplex clips/yokes

Plenum cable available upon request

[2mm cables available](#)

***Not available on all boots**

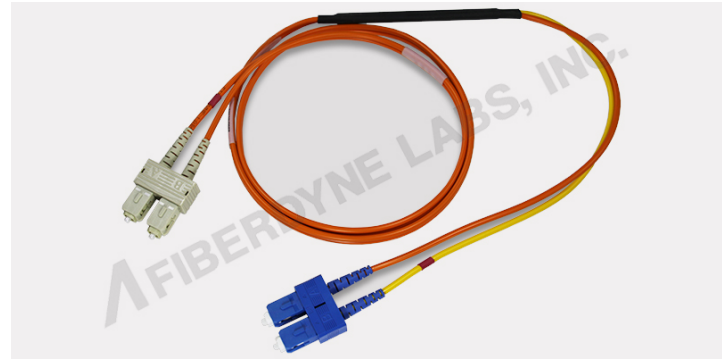

Cable & Connector Specifications:	
Fiber Type	Singlemode (9/125) 50/125 OM2 Multimode
Insertion Loss (Transmit)	<0.8dB,
Insertion Loss (Receive)	<0.5dB (0.35dB, typical)
Return Loss	>50dB (55 typical)
Radius of Curvature	7 to 25mm
Apex Offset	<50µm
Fiber Height	<100nm
Repeatability	> 500 Cycles
Operating Temperature	-40°C To +75°C
Humidity Range	5% To 95% (Non-Condensing)
Standard Compliance	IEEE Std 802.3

50/125 OM2 Mode Conditioning Assembly, Riser, 3.0mm		
SC Equip / SC Plant	F9C21K2GCYXXX	Specify Length When Ordering
SC Equip / ST Plant	F9C21K2GCY1XXX	Specify Length When Ordering
LC Equip / SC Plant	F9C21K2GCCYXXX	Specify Length When Ordering
LC Equip / ST Plant	F9C21K2GCC1XXX	Specify Length When Ordering
LC Equip / LC Plant	F9C21K2GCCXXX	Specify Length When Ordering